


LOW PROFILE CUBE




Introducing the NEW Low Profile Cube

- The low profile and compact design allow for additional items to be placed between the trailer rails or deck and at the bottom of the radiator, saving space and making for easier installation and efficiencies without additional permitting.
- The low-profile design also allows for an optional 18" "sound attenuation enclosure" to meet or exceed oil and gas low noise regulations.
- The easy access door allows for easier, safer maintenance and cleaning for improved reliability and performance.
- The new design is up to 5% lighter than traditional cube packages.
- All main components are manufactured in North America.
- All hoses are mounted internally to avoid damage and increase performance and reliability.
- Lower fan horsepower and noise than traditional cube.
- One common design for Cummins QSK50 Tier II & IV – 2250 & 2500 HP and MTU 12V000 Tier II – 2250 HP

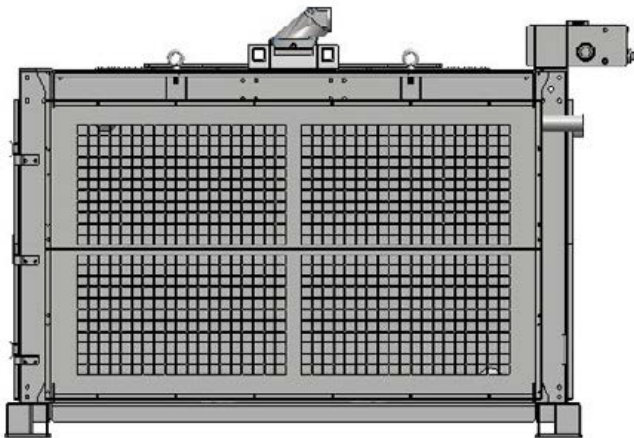

Low Profile Cube

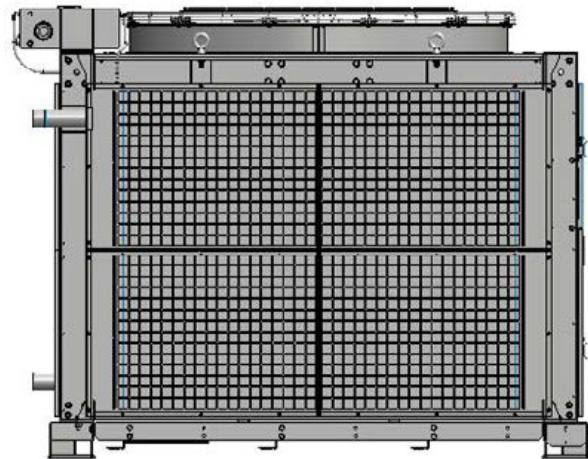

Universal Cube

Product is currently not certified.

We are currently looking for customers interested in this product for their applications.



Benefits:

- Ensures the total frac trailer will remain under 13.6 feet
- Ability to raise the radiator off the trailer to put the oil tank and other components under the radiator
- Allows space for an optional 18" sound attenuation enclosure to meet or exceed oil and gas regulations
- All aluminum cooling modules with aluminum bar and plate and/or tube bar
- Air over oil transmission cooler
- Custom designed cab-side door
- New fan system, lower horsepower and noise than traditional cube
- Plumbing of ancillary coolers to internal bulkhead and common hose connection plate to avoid damage and increase performance and reliability
- Adjustable sub-skid



High Efficiency. Easy Maintenance.

- Flexibility on sub-skid
- Cab side door
- Size & weight advantages compared to traditional coolers



	Standard Cube	Low-Profile Cube
Dimensions	107.5" W: X 102.0" L: X 109.50" (without Surge Tank) 118.67" with surge tank	77.9" W: 98" L: 112.15" (without Surge Tank) 125.88" with surge tank
Fan HP	104 HP at Standard Air	84.2 HP at Standard Air
Fan Type	84/13-13/37/PAG/9WR – Multi-Wing	HTEC 2500 8-Blade – Horton
Fan Speed	755 RPM	750 RPM
Sound Level	87.5 dBA at 25 Feet	81.7 dBA @ 21 Feet
Dry Weight	6,950 lbs.	6,575 lbs.
Cores	JW, AC, TOC, HOC, LOC, FOC	JW, AC, TOC, HOC, LOC, FOC

Heat transfer performance to the highest degree.

We have a heritage of more than 140 years designing and delivering world-class heat transfer products for nearly every industry application. With a global network of manufacturing facilities and regional sales offices, we are ready to serve. Our market-focused approach enables us to work closely with you during every step of the process. The result? Value-added, custom-engineered solutions that help ensure your success.

There's heat transfer. And then there's API Heat Transfer.



“What differentiates API Heat Transfer is the knowledge of the product—of our product and their product. When you want a heat exchanger, you go to API Heat Transfer.”

– Buyer, Industrial Market

See how our performance can improve yours.

Contact your API Heat Transfer sales rep or visit apiheattransfer.com today.

USA

Buffalo Facility

Global Headquarters
2777 Walden Avenue
Buffalo, NY 14225, USA
+1.716.684.6700

Arcade Facility

91 North Street
Arcade, NY 14009, USA
+1.585.496.5755

Franklin Facility

4700 Ironwood Drive
Franklin, WI 53132, USA
+1.414.761.4500

Iron Ridge Facility

1025 Industrial Road
Iron Ridge, WI 53035, USA
+1.920.387.4200

Racine Facility

5215 21st Street
Racine, WI 53406, USA
+1.262.554.8330

GERMANY

Bretten Facility

Langenmorgen 4
75015 Bretten, Germany
+49.7252.53.0

Dortmund Facility

Breienbachstrasse 87
44357 Dortmund, Germany
+49.231.9920.0

CHINA

Suzhou Facilities

Building 1

156 Qingqiu Street, 3rd District
Suzhou Industrial Park
Suzhou, Jiangsu 215126, China
+86.512.8816.8000

Building 2

126 Qingqiu Street, 3rd District
Suzhou Industrial Park
Suzhou, Jiangsu 215126, China
+86.512.8816.8000