

BASCO[®] **Type 500 Heat Exchangers**

Quality, Value and Performance. An API Heat Transfer Tradition.

For over 75 years, original equipment manufacturers and aftermarket providers have looked to API for a wide variety of heat transfer products. The Basco® Type 500 remains the industry standard in ultimate value and long term reliability.

Cost Effective, Reliable and Fast

Standard Heat Exchangers Deliver Cost Effective Performance.

The Basco Type 500 Shell & Tube Heat Exchanger offers the cost effectiveness that comes with having a standard design, while easily providing for various options to meet specific customer requirements. Units are available as Commercial Standard, ASME or ASME/TEMA-C. The Type 500 line is intended to provide maximum service performance at minimum cost.

Proven Reliability in Tens of Thousands of Installations.

Reliability comes from using quality materials in a well-conceived design that is properly applied by knowledgeable engineers and manufactured by skilled personnel. The Basco Type 500 features:

- High strength Carbon Steel or Stainless Steel Shells.
- Precision punched Baffles to minimize fluid by-pass and insure maximum heat transfer.
- Tubesheets in Carbon Steel, Stainless Steel, or 90/10 CuNi that are welded to the shell, and whose holes are precision drilled for proper fit.
- Tubes in Copper, Admiralty, 90/10 CuNi, Stainless Steel, and Carbon Steel are available depending on the application, and roller expanded using controlled pressure methods to ensure a proper bond.
- High grade Cast Iron, Cast Bronze or Carbon Steel and Stainless Steel Bonnets are available in one, two and four-pass designs. Zinc anodes to neutralize the effects of galvanic action can be furnished on special order.
- Heavy duty Mounting Brackets that can be reversed or rotated, and feature slotted holes to permit quick installation. Installations other than horizontal with the brackets underneath should be checked for weight.



Rugged and versatile enough to meet your most demanding needs.

Type 500 Heat Exchangers are used in these and other applications:

- Compressor Systems
- Hydraulic Systems
- Stationary Engines
- Marine Applications
- Turbines
- Paint Systems
- Air Dryers
- Vapor Recovery Systems
- Sterilizing Systems
- Lube Oil Consoles



State-of-the-Art Heat Exchanger Manufacturing Expertise for a Wide Range of Duties

Certified Production Methods and ISO Quality.

API Heat Transfer has fully embraced the superior quality, improved work-flow and cost controls inherent in certified manufacturing processes. Products are made "on-demand" from components and in-line support machining centers. API Heat Transfer also has ISO 9001 certification assuring world-class manufacturing methods and full accountability to our customers.

Our certified production methods and ISO 9001 result in reduced cycle times, increased flexibility, higher efficiencies, consistently high quality, and **MORE VALUE FOR OUR CUSTOMERS!**



Robotic CNC Machining Center assures precision drilled tubesheets, twenty-four hours a day.



Use of rolled coil tubing supports the flexibility inherent in OFT manufacturing. Special straightening equipment and unique burr-free cutting process for superior rolled joints.

Heavy stamped steel brackets are standard and can be rotated and reversed for a variety of mounting needs. Cradle mounting is available on all models.


Tubes are available in Copper, 90/10 CuNi, Stainless Steel, Admiralty or Titanium. Tubes are roller expanded. Seal welding and grooving available in some cases.

End bonnets are of high quality cast Iron, Bronze or Stainless Steel in 1, 2 or 4-pass configurations. Fabricated heads are available and are standard on TEMA-C models.

Rugged shell available in Steel and Stainless Steel. Minimum clearances between shell and baffles reduce by-pass and maximize heat transfer.

Precision punched baffles assure effective circulation by providing minimum clearances between the tubes and tube holes. Baffle cuts and spacing for each diameter are consistent with best practices.

Thick Carbon Steel, Stainless Steel or 90/10 CuNi tubesheets are welded to the shell.

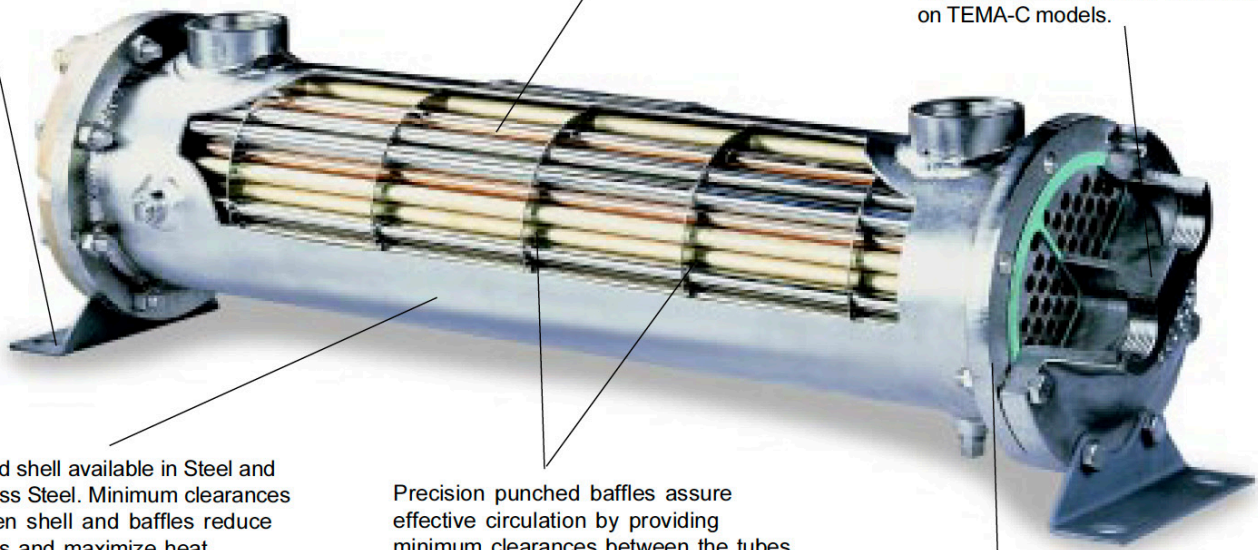

Basco Type 500

Type 500 Commercial Standard Models

3" - 8" Diameters, Straight and U-Tubes




Type 500 Standard Materials

Shell	Steel Pipe or Tubing
Tubes	Copper, Admiralty or 90/10 CuNi
Tubesheets	Steel, Stainless or 90/10 CuNi
Bonnets	Cast Iron
Baffles	Carbon Steel
Gaskets	Compressed Fiber

Commercial standard model and modified model with special shellside flanges shown. Several modifications are available without adding manufacturing delays.

Type 500 Stainless Steel Models

3" - 8" Diameters, Straight and U-Tubes

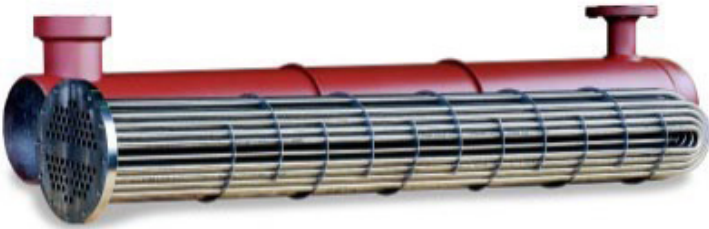

Type 500 S Materials

Shell	Welded 304 Stainless
Tubes	304 Stainless Steel
Tubesheets	304 Stainless Steel
Bonnets	Cast 304 Stainless
Baffles	304 Stainless Steel
Gaskets	Compressed Fiber

Model shown is removable tubesheet U-tube with type 304 Stainless Steel tubing. Fixed bundle models also available.

Type 500 ASME and TEMA-C Models

5" - 12" Diameters, Straight and U-Tubes



ASME and TEMA-C Materials

Shell	Carbon Steel
Tubes	Copper, Admiralty or 90/10 CuNi, SS
Tubesheets	Carbon Steel, 90/10, SS
Bonnets	Carbon Steel, Cast Ductile Iron
Baffles	Carbon Steel, SS
Gaskets	Compressed Fiber

ASME Code models are available from 5" diameter and up. TEMA-C models are available in straight and U-tube designs through 12" diameter.

Product Nomenclature

Size (inches)

05 Shell Diameter	024 Tube Length
-----------------------------	---------------------------

Overall length, shell port center distance and mounting hole locations can be adjusted by adding or subtracting the actual tube length differential.

Standard Ratings

Design Pressure	Std Units	TEMA-C/ASME
Shellside	300 psi	150 psi
Tubeside	150 psi	150 psi
Design Temp	300°F, Stainless higher	

Test Pressure - All units are either pneumatically or hydrostatically tested.

Shells - Steel or 304 Stainless pipe to ASME specification. Shells are cleaned prior to assembly.

Tubes - Copper, roller expanded into tubesheet in 1/4", 3/8" or 5/8" OO. Also available in Admiralty, 304, 316 Stainless Steel or 90/10 CuNi.

Tubesheets - Quality steel to ASME specifications. Precision machined for excellent sealing. Stainless Steel and 90/10 CuNi also available in all sizes.

Baffles - Hot-rolled punched steel for enhanced strength and reliability. Engineered for correct fit to reduce tube wall damage from high velocity fluids. Also available in Brass and 304 Stainless Steel.

Heads - Cast or fabricated construction. Available in 1, 2, or 4-pass designs to meet ASME specifications. Designed to provide excellent gasket sealing. Options include fabricated heads from Steel, 304 Stainless, and 90/10 CuNi. Cast heads are available in Iron, cast 304 Stainless, or cast Bronze. Zinc anodes can be supplied for added protection.

Connections - Tubeside or shellside threaded or flanged in sizes 3", 4", 5", 6" and 8". Additional connections can be provided as option on all models.

Codes - ASME, ASME/TEMA-C are available and stamped accordingly. Code Version 1 has ductile iron bonnets and tubing for shell. Code Version 2 has fabricated heads and pipe for shell.

Finish - Exterior surfaces are cleaned and painted with a high quality oxide primer.

Common Specifications

Standard Straight-Tube Type 500 Heat Exchangers

Model	Shell Dia.	Surface					Connection Size (Max Flow)			
		3/8"	5/8"	1/4"	3/8"	5/8"	Shell	1-Pass	2-Pass	4-Pass
03014	3-1/4"	24	NA	4.6	2.7	-	1	1-1/2 (47)	1 (23)	1 (12)
03024				7.8	4.8	-				
04014	4-1/2"	44	NA	7.9	5	-	1/1/2002	2 (86)	1-1/4 (43)	3/4 (22)
04024				13.6	8.6	-				
04036				20.4	12.2	-				
05014	5-1/4"	80	28	13.7	9.1	5.3	1/1/2002	2-1/2 (160)	1-1/2 (80)	1 (40)
05024				23.6	15.7	9.1				
05036				35.4	24	13.6				
06024	6-3/4"	116	40	34.5	22.8	13	2	3 (230)	2 (115)	2 (57)
06036				51.8	34.2	19.5				
06048				69.1	45.6	26				
06060				86.4	57	32.5				
08024	8-5/8"	232	76	-	45.6	24.9	3	3 (461)	2-1/2 (231)	2 (115)
08036				-	68.3	37.3				
08048				-	91.1	49.7				
08060				-	114	62.1				
08072				-	136.7	74.5				

ASME Code Straight-Tube Type 500 Heat Exchangers

Model	Shell Dia.	No. Tubes			Surface			Connection Size (Max Flow)			
		3/8"	5/8"	1/4"	3/8"	5/8"	Shell	1-Pass	2-Pass	4-Pass	
05024 per foot	5-1/4"	80	28	-	15.7 7.8	28 4.5	1/1/2002	2-1/2 (160)	1-1/2 (80)	1 (40)	
06024 per foot	6-3/4"	116	40	-	22.8 11.4	13 6.5	2	3 (230)	2 (115)	1-1/2 (57)	
08024 per foot	8-5/8"	232	76	-	45.6 22.8	24.9 12.4	3	3 (461)	2-1/2 (231)	2 (115)	

ASME/TEMA-C Straight-Tube Heat Exchangers

Model	Shell Dia.	No. Tubes			Surface			Connection Size (Max Flow)			
		3/8"	5/8"	1/4"	3/8"	5/8"	Shell	1-Pass	2-Pass	4-Pass	
05024 per foot	5-1/4"	72	20	-	14 7.8	6.5 4.5	1-1/2	2-1/2 (160)	1-1/2 (80)	1 (40)	
06024 per foot	6-3/4"	104	36	-	20.4 10.2	11 5.9	2	3 (230)	2 (115)	1-1/2 (57)	
08024 per foot	8-5/8"	208	60	-	40.9 20.4	22.2 11.1	3	3 (461)	2-1/2 (231)	2 (115)	
10120 per foot	10-3/4"	344	116	-	338 34	190 19	4 FL	6 FL (630)	4 FL (315)	2-1/2 (158)	
12120 per foot	12-3/4"	516	172	-	507 51	281 28	6 FL	6 FL (935)	4 FL (465)	3 (234)	

Standard Type 500 U-Tube Heat Exchangers

Model	Shell Dia.	No. Tubes			Surface			Connection Size (Max Flow)			
		3/8"	5/8"	1/4"	3/8"	5/8"	Shell	1-Pass	2-Pass	4-Pass	
05048 per foot	5-1/4"	34	8	-	27 6.8	11 2.7	1-1/2	-	1-1/2 (44)	1 (22)	
6024 per foot	6-3/4"	52	14	-	51 102	18.5 4.6	2	-	2 (77)	1-1/2 (38)	
8024 per foot	8-5/8"	104	34	-	82 20.5	44.5 11.2	3	-	2-1/2 (185)	2 (93)	

ASME/TEMA-C U-Tube Heat Exchangers*

Model	Shell Dia.	No. Tubes			Surface			Connection Size (Max Flow)			
		3/8"	5/8"	1/4"	3/8"	5/8"	Shell	1-Pass	2-Pass	4-Pass	
10120 per foot	10-3/4"	174	58	-	350 34	195 19	4 FL -316	-	4 FL (316)	2-1/2 (158)	
12120 per foot	12-3/4"	260	88	-	527 51	297 29	4 FL -480	-	4 FL (480)	3 (240)	

* Max tube length: 3/8" OD - 12 feet; 5/8" OD - 20 feet. Max flow based on 8 fps. Corrosion allowance: 1/16" both sides on TEMA-C models. Flanges are 150# ANSI Raised-Face

Basco Type 500 Straight-Tube Heat Exchangers


COMMERCIAL STANDARD - COMMON DIMENSIONS												SINGLE-PASS					
Model	A	B	C	D	E	F	G	H	J	K-NPT	L-NPT	M	N	P	R-NPT	S-NPT	T
03014 03024	3-1/4	4-1/2	10 20	2-5/16	16-3/8 26-3/8	2-3/4	4-1/2	1-5/8	7/16	1/4	1	17-3/8 27-3/8	3-11/16	1/2	3/8	1-1/2	3/8
04014 04024 04036	4-1/4	6	9 19 31	3-1/8	16-5/8 29-5/8 38-5/8	3-1/2	4-1/4	1-3/4	7/16	1/4	1-1/2	17-7/8 27-7/8 39-7/8	4-7/16	5/8	3/8	2	-
05014 05024 05036	5-1/4	6-3/4	9 19 31	3-7/16	17-1/8 27-1/8 39-1/8	4	5-1/4	2	1/2 X 3/4	1/4	1-1/2	19 29 41	5	15/16	3/8	2-1/2	-
06024 06036 06048 06060	6-1/4	7-3/4	18-1/4 30-1/4 42-1/4 54-1/4	4-1/16	27-1/8 39-1/8 51-1/8 63-1/8	4-1/2	6-1/4	2-1/2	1/2 X 3/4	3/8	2	29-1/8 41-1/8 53-1/8 65-1/8	5-7/16	1	1/2	3	-
08024 08036 08048 08060 08072	8-5/8	10-1/2	17 29 41 53 65	5-7/16	27-1/2 39-1/2 51-1/2 63-1/2 75-1/2	5-3/4	8-1/4	3-1/2	5/8 X 7/8	3/8	3	31-1/8 43-1/8 55-1/8 67-1/8 79-1/8	7-7/16	1-13/16	1/2	3	-

5", 6" & 8" ASME CODE - COMMON DIMENSIONS												SINGLE-PASS					
Model	A	B	C	D	E	F	G	H	J	K-NPT	L-NPT	M	N	P	R-NPT	S-NPT	T
05048	5-1/4	6-3/4	42	3-7/8	5-5/8	4	5-1/4	2	1/2 X 3/4	1/4	1-1/2	53-1/2	5-3/4	15/16	3/8	2-1/2	-
06048	6-1/4	7-3/4	41-1/2	4-7/16	5-3/4	4-1/2	6-1/4	2-1/2	1/2 X 3/4	3/8	2	53-3/4	6-1/8	1	1/2	3	-
08048	8-5/8	10-1/2	40	5-7/8	5-3/8	5-3/4	8-1/4	3-1/2	5/8 X 7/8	3/8	3	56	8	1-13/16	1/2	3	-


10" & 12" ASME TEMA C - COMMON DIMENSIONS												SINGLE-PASS					
Model	A	B	C	D	E	F	G	H	J	K-NPT	L-NPT	M	N	P	R-NPT	S-NPT	T
10120	10-3/4	145-3/8	109-1/2	11-1/8	11-1/8	6-13/16	10	2	13-3/4	2-1/4	12-1/2	4	5-3/4	1-3/8	4 FL	6 FL	-
12120	12-3/4	145-3/4	107-1/2	12-7/16	12-7/16	6-15/16	11	2-1/2	15-3/4	2-1/4	14-1/2	5	6-1/8	1-3/8	6 FL	6 FL	-

All models are available in other lengths. Apply the appropriate dimension changes to all length measurements along the centerline. Maximum tube length for 3/8" tubing is 12 feet. Maximum tube length for 5/8" tubing is 20 feet. FL indicates ANSI 150 lb. RF flange. Code design models are equipped with bottom drain only on the shell side. Bonnet vents may not be tapped unless required or if equipped with zinc anodes.


SINGLE-PASS STANDARD and CODE

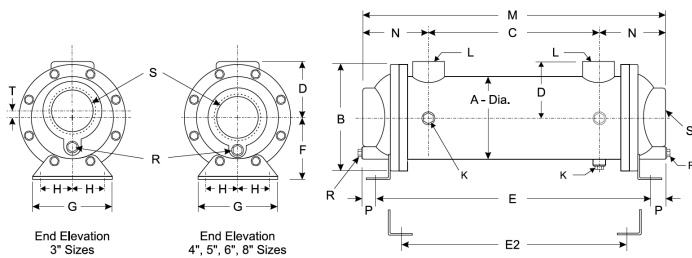


TWO-PASS STANDARD and CODE

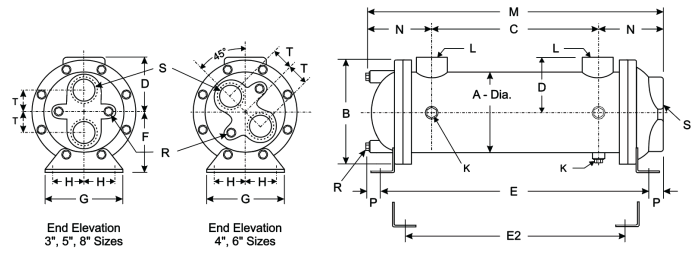

SINGLE-PASS ASME TEMA-C

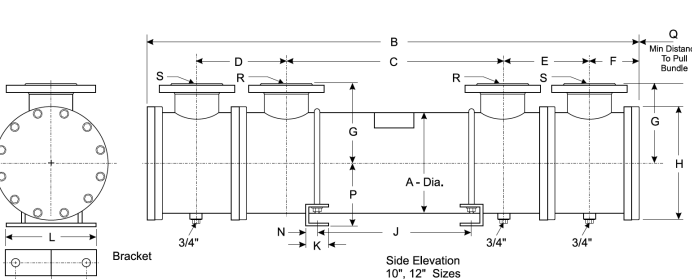

TWO-PASS ASME TEMA-C

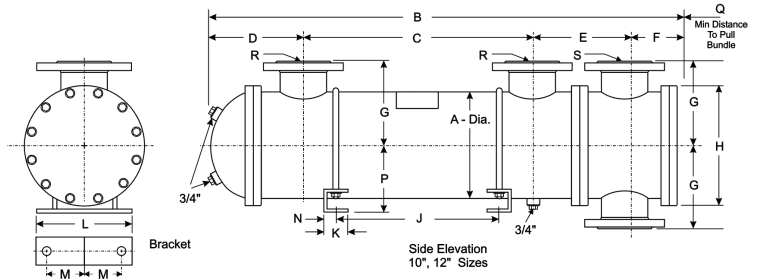

Basco Type 500 Straight-Tube Heat Exchangers


Model	TWO-PASS						FOUR-PASS						WEIGHT	E2	MODEL
	M	N	P	R-NPT	S-NPT	T	M	N	P	R-NPT	S-NPT	T			
03014 03024	17- ¹ / ₈ 27- ¹ / ₈	3- ⁹ / ₁₆	³ / ₈	³ / ₈	1	1	17- ¹ / ₈ 27- ¹ / ₈	3- ⁹ / ₁₆	³ / ₈	³ / ₈	³ / ₄	1	18 23	13- ⁵ / ₈ 23- ⁵ / ₈	03014 03024
04014 04024 04036	17- ⁷ / ₈ 27- ⁷ / ₈ 39- ⁷ / ₈	4- ⁷ / ₁₆	⁵ / ₈	³ / ₈	1- ³ / ₄	1- ¹ / ₁₆	17- ⁷ / ₈ 27- ⁷ / ₈ 39- ⁷ / ₈	4- ⁷ / ₁₆	⁵ / ₈	³ / ₈	³ / ₄	1- ¹ / ₄	32 41 52	13- ⁷ / ₈ 23- ⁷ / ₈ 35- ⁷ / ₈	04014 04024 04036
05014 05024 05036	19 29 41	5	¹⁵ / ₁₆	³ / ₈	1- ¹ / ₂	1- ¹ / ₂	18- ¹³ / ₁₆ 28- ¹³ / ₁₆ 40- ¹³ / ₁₆	4- ¹³ / ₁₆	³ / ₄	³ / ₈	1	1- ¹¹ / ₁₆	45 55 75	13- ³ / ₈ 23- ³ / ₈ 35- ³ / ₈	05014 05024 05036
06024 06036 06048 06060	29- ¹ / ₈ 41- ¹ / ₈ 53- ¹ / ₈ 65- ¹ / ₈	5- ⁷ / ₁₆	1	¹ / ₂ See note	2	1- ⁹ / ₁₆	29- ¹ / ₈ 41- ¹ / ₈ 53- ¹ / ₈ 65- ¹ / ₈	5- ⁷ / ₁₆	1	¹ / ₂ See note	1- ¹ / ₂	2	75 100 125 150	23- ¹ / ₂ 35- ¹ / ₂ 47- ¹ / ₂ 59- ¹ / ₂	06024 06036 06048 06060
08024 08036 08048 08060 08072	30- ⁵ / ₈ 42- ⁵ / ₈ 54- ⁵ / ₈ 66- ⁵ / ₈ 78- ⁵ / ₈	7- ¹ / ₁₆	1- ¹³ / ₁₆	¹ / ₂ See note	2- ¹ / ₂	2- ¹ / ₄	30- ⁵ / ₈ 42- ⁵ / ₈ 54- ⁵ / ₈ 66- ⁵ / ₈ 78- ⁵ / ₈	7- ¹ / ₁₆	1- ¹³ / ₁₆	¹ / ₂ See note	2	2- ¹ / ₂	165 215 285 325 390	23- ⁵ / ₈ 35- ⁵ / ₈ 47- ⁵ / ₈ 59- ⁵ / ₈ 71- ⁵ / ₈	08024 08036 08048 08060 08072

Model	TWO-PASS						FOUR-PASS						WEIGHT	E2	MODEL
	M	N	P	R-NPT	S-NPT	T	M	N	P	R-NPT	S-NPT	T			
05048	53- ¹ / ₂	5- ³ / ₄	¹⁵ / ₁₆	³ / ₈	1- ¹ / ₂	1- ¹ / ₂	53- ⁵ / ₁₆	5- ⁹ / ₁₆	³ / ₄	³ / ₈	1	1- ¹¹ / ₁₆		47- ⁷ / ₈	05048
06048	53- ³ / ₄	6- ¹ / ₈	1	¹ / ₂	2	1- ⁹ / ₁₆	53- ³ / ₄	6- ¹ / ₈	1	¹ / ₂	1- ¹ / ₂	2		48- ¹ / ₈	06048
08048	56	8	1- ¹³ / ₁₆	¹ / ₂	2- ¹ / ₂	2- ¹ / ₄	55- ¹ / ₂	8	1- ¹³ / ₁₆	¹ / ₂	2	2- ¹ / ₂		48- ¹ / ₄	08048


Model	TWO-PASS						FOUR-PASS						WEIGHT	E2	MODEL
	M	N	P	R-NPT	S-NPT	T	M	N	P	R-NPT	S-NPT	T			
10120	4	1- ³ / ₈	7	4 FL	4 FL	-	4	1- ³ / ₈	13- ³ / ₄	4 FL	2- ¹ / ₂	-			10120
12120	5	8- ¹ / ₄	8- ¹ / ₄	6 FL	6 FL	-	5	1- ³ / ₈	15- ³ / ₄	6 FL	3	-			12120

All models are available in other lengths. Apply the appropriate dimension changes to all length measurements along the centerline. Maximum tube length for 3/8" tubing is 12 feet. Maximum tube length for 5/8" tubing is 20 feet. FL indicates ANSI 150 lb. RF flange. Code design models are equipped with bottom drain only on the shell side. Bonnet vents may not be tapped unless required or if equipped with zinc anodes.

FOUR-PASS STANDARD and CODE

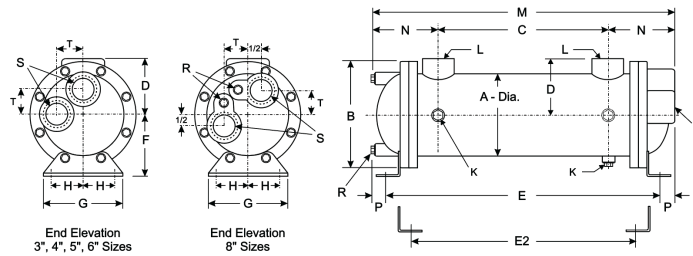

FOUR-PASS ASME TEMA-C

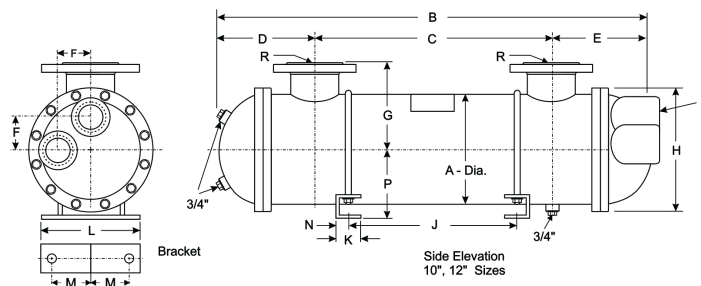

Basco Type 500 U-Tube Heat Exchangers

COMMERCIAL STANDARD U-TUBE - COMMON DIMENSIONS

Model	A	B	C	D	E	F	G	H	J	K-NPT	L-NPT
05048	5 1/4	6 3/4	48 1/2	3 7/16	57- 5/16	4	4-1/2	2	1/2 x 3/4	1/4	1-1/2
06048	6 1/4	7 3/4	49	4 1/16	58- 3/8	4-1/2	6-1/4	2-1/2	1/2 x 3/4	3/8	2
08048	8 5/8	10 1/2	50 1/2	5 7/16	61- 13/16	5-3/4	8-1/4	3-1/2	5/8 x 7/8	3/8	3

5" 6" & 8" ASME CODE MODELS


Model	A	B	C	D	E	F	G	H	J	K-NPT	L-NPT
05048	5 1/4	6 3/4	48 1/2	3 7/8	57- 5/16	4	5-1/4	2	1/2 x 3/4	1/4	1-1/2
06048	6 1/4	7 3/4	49	4 7/16	58- 3/8	4-1/2	6-1/4	2-1/2	1/2 x 3/4	3/8	2
08048	8 5/8	10 1/2	50 1/2	5 7/8	61- 13/16	5-3/4	8-1/4	3-1/2	5/8 x 7/8	3/8	3

10" & 12" ASME / TEMA-C MODELS


Model	A	B	C	D	E	F	G	H	J	K	L
10120	10- 3/4	148- 3/4	121	8- 5/16	12	6- 13/16	10	13- 3/4	105	2- 1/4	12- 1/2
12120	12- 3/4	153- 1/2	122- 1/2	10- 9/16	13- 1/2	6- 15/16	11	15- 3/4	109	2- 1/4	14- 1/2

All models are available in other lengths. Apply the appropriate dimension changes to all length measurements along the centerline. Maximum tube length for 3/8" tubing is 12 feet. Maximum tube length for 5/8" tubing is 20 feet. FL indicates ANSI 150 lb. RF flange.

TWO-PASS U-TUBE MODELS

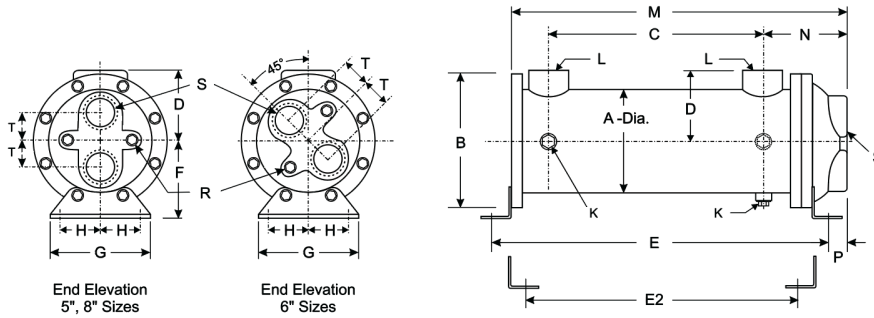

TWO-PASS U-TUBE ASME-TEMA C

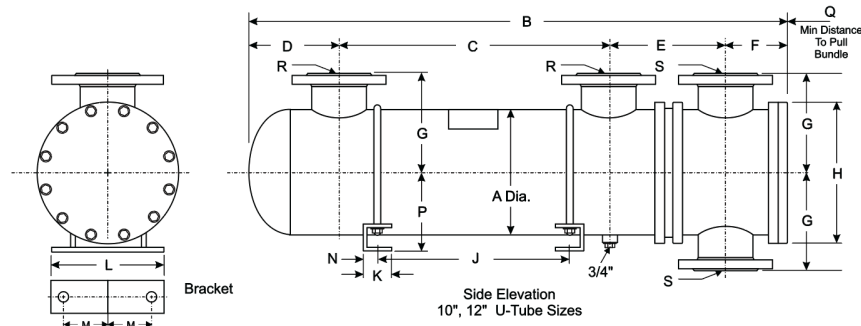

Basco Type 500 U-Tube Heat Exchangers


TWO-PASS						FOUR-PASS						WEIGHT	E2	MODEL
M	N	P	R-NPT	S-NPT	T	M	N	P	R-NPT	S-NPT	T			
57- ¹ / ₁₆	5- ³ / ₄	¹⁵ / ₁₆	³ / ₈	1- ¹ / ₂	1- ¹ / ₂	57- ¹ / ₁₆	5- ⁹ / ₁₆	³ / ₄	-	1	1- ¹¹ / ₁₆	80	53- ⁹ / ₁₆	05048
58- ³ / ₈	6- ¹ / ₈	1	¹ / ₂	2	1- ⁹ / ₁₆	58- ³ / ₈	6- ¹ / ₈	1	-	1- ¹ / ₂	2	135	54- ³ / ₄	06048
62- ¹ / ₂	8	1- ¹³ / ₁₆	¹ / ₂	2- ¹ / ₂	2- ¹ / ₄	60- ¹ / ₂	8	1- ¹³ / ₁₆	¹ / ₂	2	2- ¹ / ₂	300	57- ⁵ / ₈	08048

TWO-PASS						FOUR-PASS						WEIGHT	E2	MODEL
M	N	P	R-NPT	S-NPT	T	M	N	P	R-NPT	S-NPT	T			
57-1/4	5-3/4	¹⁵ / ₁₆	³ / ₈	1-1/2	1-1/2	57- ¹ / ₁₆	5-9/16	3/4	-	1	1- ¹¹ / ₁₆	90	53- ⁹ / ₁₆	05048
58- ³ / ₈	6- ¹ / ₈	1	¹ / ₂	2	1- ⁹ / ₁₆	58- ³ / ₈	6-1/8	1	-	1- ¹ / ₂	2	145	54- ³ / ₄	06048
62- ¹ / ₂	8	1- ¹³ / ₁₆	¹ / ₂	2- ¹ / ₂	2- ¹ / ₄	62- ¹ / ₂	8	1-13/16	¹ / ₂	2	2- ¹ / ₂	310	57- ¹¹ / ₁₆	08048


TWO-PASS						FOUR-PASS						WEIGHT	E2	MODEL
M	N	P	Q	R	S	M	N	P	Q	R	S			
4	1- ³ / ₈	7	116	4 FL	4 FL	4	1- ³ / ₈	7	122	4 FL	2- ¹ / ₂	1085	-	10120
5	1- ³ / ₈	8- ¹ / ₄	117	6 FL	4 FL	5	1- ³ / ₈	8- ¹ / ₄	123	6 FL	3	1580	-	12120

All models are available in other lengths. Apply the appropriate dimension changes to all length measurements along the centerline. Maximum tube length for 3/8" tubing is 12 feet. Maximum tube length for 5/8" tubing is 20 feet. FL indicates ANSI 150 lb. RF flange.

FOUR-PASS U-TUBE MODELS

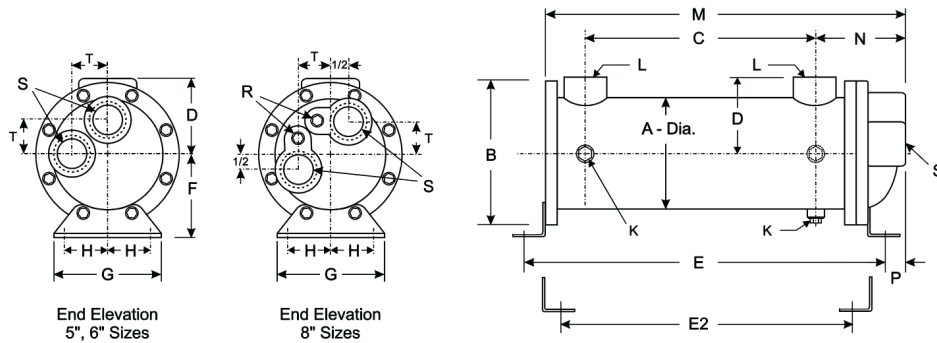


FOUR-PASS U-TUBE ASME-TEMA C

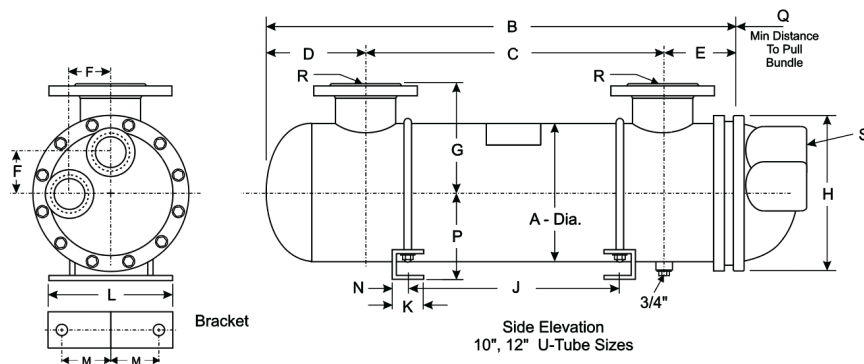

$$LMTD = \frac{(GTTD - LTTD)}{\text{LogN} \left(\frac{GTTD}{LTTD} \right)}$$

GTTD = Greater Terminal Temp Difference
 LTTD = Lesser Terminal Temp Difference

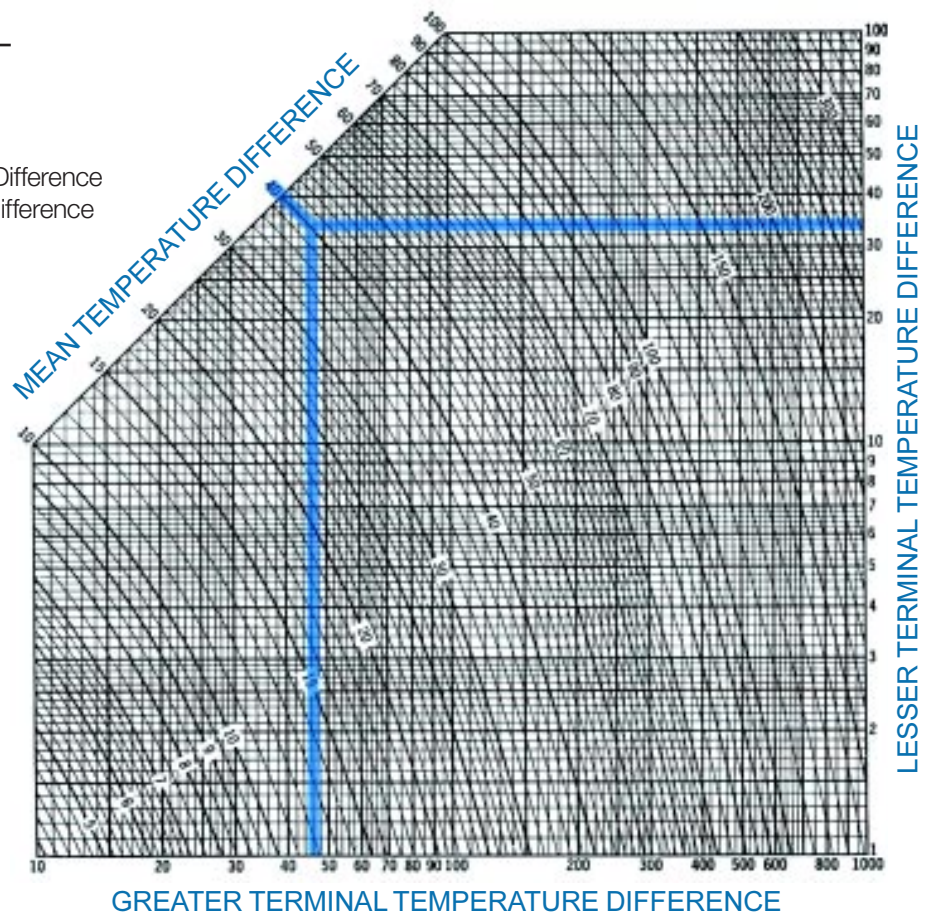

P

	0.5	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.45	0.5	0.6	0.7	0.8	0.9	1.0
0.2								.99	.99	.98	.97	.94	.90	.84	.71
0.4							.99	.98	.97	.95	.92	.85	.70		
0.6					.99	.98	.96	.94	.92	.84					
0.8			.99	.98	.96	.94	.91	.87							
1.0			.98	.97	.94	.91	.86	.77							
2.0		.99	.97	.94	.84	.74									
3.0		.97	.93	.83											

R

4.0	.99	.95	.85
5.0	.98	.91	
6.0	.96	.85	
8.0	.93		
10.0	.99	.88	
12.0	.98	.72	
14.0	.97		
16.0	.95		
18.0	.94		
20.0	.91		

$$P = \frac{T_1 - T_2}{t_2 - t_1}$$

$$R = \frac{t_2 - t_1}{T_1 - T_2}$$

Locate Correction Factor at Intersection of "R" and "P"

Correction for LMTD when Using Multi-Pass Heat Exchangers.

Multi-pass heat exchangers cannot take full advantage of counter-current flow, which changes the LMTD for the application.

To correct the LMTD, multiply the value obtained from the above graph by the correction factor obtained from this correction graph. If the P and R values intersect outside the graph, consult the factory to discuss your specific application.

- T1** Hot Fluid Inlet Temp, °F
- T2** Hot Fluid Outlet Temp, °F
- t₁** Cold Fluid Inlet Temp, °F
- t₂** Cold Fluid Outlet Temp, °F

Sample Calculation To Select the Right Type 500 Heat Exchanger.

Conditions

Process Fluid.....20 GPM of SAE 10 Oil to be cooled from 140° to 120°F.

Cooling Medium.... Water at 85°F. Assume a 10° maximum temperature rise.

Cooler Design 4-Pass design is selected to conserve water and energy usage.

Thermal Duty Determination

$$Q = \Delta T \cdot \text{Thermal Duty Value (Chart)} \cdot \text{GPM (or air SCFM)} \\ Q = (140-120) \cdot 204 \cdot 20$$

$$Q = 81,600 \text{ Btuh (Btu's per hour)}$$

Determine Cooling Water Flow Required

$$Q = \Delta T (\text{allowable temp rise}) \cdot \text{Flow Constant} \cdot \text{GPM}$$

$$\frac{Q}{\Delta T \cdot \text{Flow Constant}} = \text{GPM} = \frac{81,000}{10 \cdot 500} \\ = 16.3 \text{ GPM}$$

Determine Exchanger Surface Required

$$\text{Area} = \frac{Q}{U \cdot \text{Log Mean Temp Difference}}$$

$$Q = 81,600 \text{ Btuh}$$

"U-Value" is obtained from the chart. For light oil the range is from 70-100. Assuming the oil to be typical machine lubricant with moderate fouling characteristics we will use 80 as a conservative U-Value.

Calculate LMTD from graph on facing page

$$\begin{array}{r} 140^\circ \text{ --- } 120^\circ \text{ (Oil } \Delta T) \\ - 95^\circ \text{ --- } - 85^\circ \text{ (Water } \Delta T) \\ \hline 45^\circ \text{ --- } 35^\circ \end{array}$$

Thus... greater temperature difference = 45°
lesser temperature difference = 35°

Reading from the graph, LMTD = 40°F

$$\text{Area} = \frac{Q}{U \cdot \text{LMTD}} = \frac{81,600 \text{ Btuh}}{80 \cdot 40} \\ = 25.5 \text{ sq. ft.}$$

Select a Type 500 Heat Exchanger

Refer to the Common Specification chart on page five. Notice that Model 05036 has 24 square feet of surface and is too small for the application.

Model 06036 has 116 tubes and contains 34 sq. ft. of tube surface. Now assure the max flow rate is not exceeded. The previous calculated flow rate is 16.3 GPM. The 06036 has a maximum flow rate of 57 GPM. This is acceptable.

In the event that the required flow rate exceeds the maximum flow rate for the heat exchanger, a larger model is required.

Calculating Actual Heat Exchanger Length

You can calculate the actual length of the heat exchanger required to satisfy a given set of conditions. The typical tube surface contained per linear foot of tubing is:

1/4" Tubing.....0.0655 sq. ft per ft. of tubing

3/8" Tubing.....0.0982 sq. ft per ft. of tubing

5/8" Tubing.....0.1636 sq. ft per ft. of tubing

$$\text{Linear feet of tubing required} = \frac{\text{Area Required}}{\text{No. of Tubes} \cdot \frac{\text{Area}}{\text{Per Foot}}}$$

Using the previous example...

$$\text{Linear Feet} = \frac{26 \text{ sq. ft.}}{116 \text{ tubes} \cdot 0.0982} = 2.28 \text{ feet}$$

Calculating Tube Side Velocity

You can calculate the velocity of the fluid flowing through the tubes. Velocity should fall between 2 and 6 feet per second and not exceed 8 feet per second. Velocity factors for standard tubing are:

1/4" Tubing.....9.66 velocity factor, (Vf)

3/8" Tubing.....4.02 velocity factor, (Vf)

5/8" Tubing.....1.47 velocity factor, (Vf)

Using the previous example...

$$\text{Velocity (ft./sec.)} = \frac{16.3 \text{ (GPM)} \cdot 4.02 \text{ (Vf)} \cdot 4 \text{ (Passes)}}{116 \text{ (No. of Tubes)}} \\ = 2.26 \text{ feet per second in the tubes}$$

Common Heat Transfer Formulas

Btuh	=	Btu/min. • 60
Btuh	=	Horsepower • 2,545
Btuh	=	Kw • 3,413
Btuh Oil	=	GPM (Oil) • 204 • ΔT
Btuh Water	=	GPM (Water) • 500 • ΔT
LMTD °F	=	LMTD °C • 1.8

TYPICAL THERMAL DUTY VALUES


Liquid Type	Constant Value	Spec. Gravity	Spec. Heat	oC	oF
Water	500	x 1.0	x 1.0	= 238	or 500
50% Ethlene Glycol	500	x 1.04	x .83	= 203	or 428
Oil (150 SSU)	500	x .85	x .48	= 97	or 204
Air	4.58	x -	x .241	=	110 SCFM

TYPICAL OVERALL U-VALUES

Hot Fluid	Cooling Fluid	U-Value (typical)
Steam	Water	300-500
Steam	Light Oil (SAE 10)	70-100
Steam	Heavy Oil	40-50
Steam	Air	30-40
Water	Water (85°F)	275-325
Oil (SAE 10)	Water (85°F)	70-100
Oil (SAE 30)	Water (85°F)	60-80
50% Glycol	Water	150-180

Note: Higher U-Values apply to clean, low viscosity flows. Use lower U-Values for higher pressure, dirty or viscous fluids as they tend to foul a heat exchanger.



API Heat Transfer, a family of high-performance brands 

High-performance heat transfer.

It's who we are and what we do. It's part of our 140-year heritage designing and delivering world-class heat transfer products for nearly every industry. It's bolstered by our worldwide network of manufacturing facilities that provide sales, service, and support. And it's ingrained in a process that has helped customers around the world for nearly a century and a half.

When you work with us, you'll find the performance of our technologies sets the bar for heat transfer products, and our relentless drive to find and create custom heat transfer solutions to meet any industry challenge sets us apart.

See how our performance can improve yours.

Contact your API Heat Transfer sales rep or visit apiheattransfer.com today.

USA

Buffalo Facility

2777 Walden Avenue
Buffalo, NY 14225, USA
+1.716.684.6700

Iron Ridge Facility

1025 Industrial Road
Iron Ridge, WI 53035, USA
+1.920.387.4200

Franklin Facility

4700 Ironwood Drive
Franklin, WI 53132, USA
+1.414.761.4500

Racine Facility

5215 21st Street
Racine, WI 53406, USA
+1.262.554.8330

GERMANY

Bretten Facility

Langenmorgen 4
75015 Bretten, Germany
+49.7252.53.0

Dortmund Facility

Breienbachstrasse 87
44357 Dortmund, Germany
+49.231.9920.119

CHINA

Suzhou Facilities Building 1

156 Qingqiu Street, 3rd District
Suzhou Industrial Park
Suzhou, Jiangsu 215126, China
+86.512.8816.8000

Building 2

126 Qingqiu Street, 3rd District
Suzhou Industrial Park
Suzhou, Jiangsu 215126, China
+86.512.8816.8000

Shanghai

Gubei 1699 Commercial Plaza
Room 905-1
1699 Gubei Road
Minhang District
Shanghai 201103, China
+86. 21.5426.2525

